


INSTRON 3367型 双立柱台式电子试验机

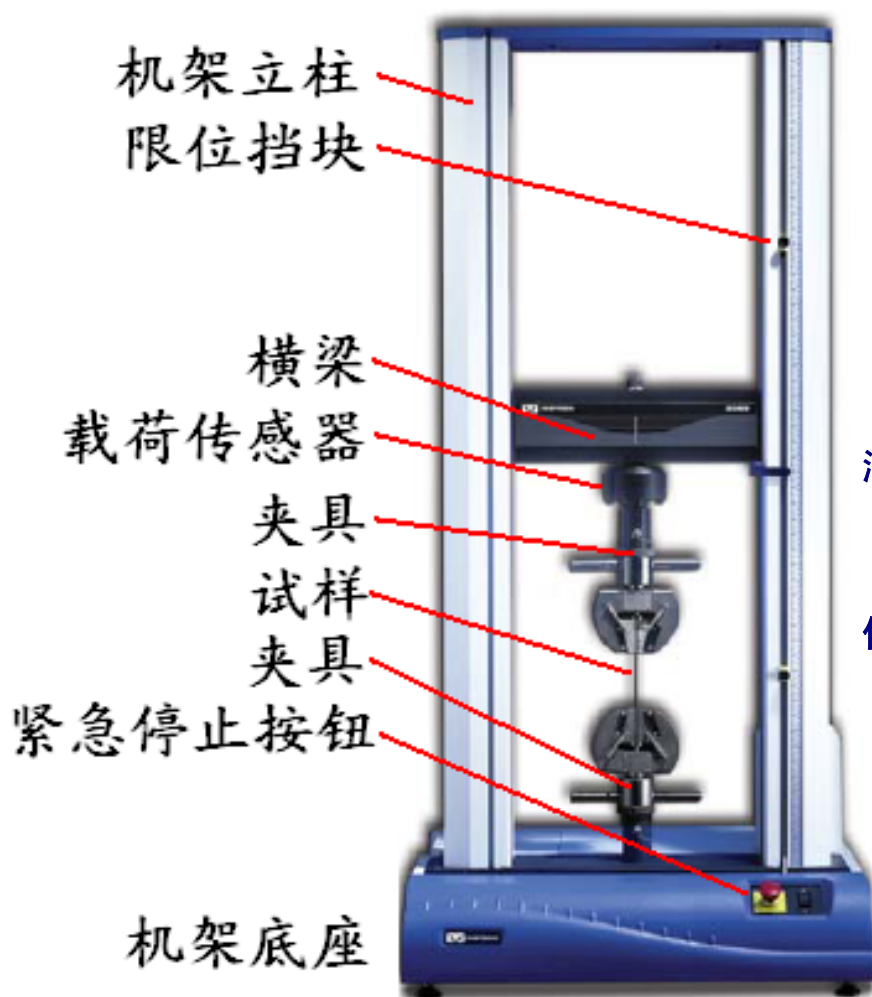

| | | |
|---------|-------|---------------|
| 最大容量 | 30 | kN |
| 最大速度 | 500 | mm/min |
| 最小速度 | 0.005 | mm/min |
| 全速时最大力 | 15 | kN |
| 满载时最大速度 | 250 | mm/min |
| 返回速度 | 600 | mm/min |
| 位置控制分辨率 | 0.054 | μm |
| 总行程 | 1122 | mm |
| 立柱间距 | 420 | mm |
| 功率 | 600 | VA |

Common Specifications

| | |
|-------------------------------------|--|
| Crosshead Speed Accuracy: | (zero or constant load) $\pm 0.2\%$ of set speed |
| Load Measurement Accuracy: | $\pm 0.5\%$ of reading down to 1/100 of load cell capacity. |
| Strain Measurement Accuracy: | $\pm 0.5\%$ of reading down to 1/50 of full scale. |
| Operating Temperature: | +10 °C to +38 °C (+50 °F to +100 °F) |
| Storage Temperature: | -40 °C to +66 °C (-40 °F to +150 °F) |
| Humidity Range: | 10% to 90%, noncondensing |